





ECG 300G

USER MANUAL

www.westernsurgical.in Email : westernsurgical@gmail.com Email : info@westernsurgical.in Ph. : +91-281-2232871 / 2243159

Statement

Our company owns all rights to this unpublished work and intends to maintain this work as confidential. We may also seek to maintain this work as an unpublished copyright. This publication is to be used solely for the purpose of reference, operation, maintenance, or repair of our equipment. No part of this can be disseminated for other purposes.

In the event of inadvertent or deliberate publication, our company intends to enforce its rights to this work under copyright laws as a published work. Those having access to this work may not copy, use, or disclose the information in this work unless expressly authorized by us to do so.

All information contained in this publication is believed to be correct. Our company shall not be liable for consequential damages in connection with the furnishing, performance, or use of this material. This publication may refer to information and protected by copyrights or patents and does not convey any license under the patent rights of our company, nor the rights of others. Our company does not assume any liability for arising out of any infringements of patents or other rights of the third parties.

Content of this manual is subject to change without prior notice.

Due to constant upgradation design, price and features are subject to change without prior notice.



Contents

Chapter I	Main Technical Specification1
Chapter 2	Security Notice
Chapter 3	Maintenance Regulation
Chapter 4	Instrument Characteristics
Chapter 5	ECG300G Panel Sketch Map6
Chapter 6	Attention before Operating
Chapter 7	Preparation Work before Instrumentation10
Chapter 8	Precaution during Operation11
Chapter 9	Instruction of Recording Paper
Chapter 10	Electrode Placement
Chapter 11	Grounding and Power Connection of Instrument15
Chapter 12	Precaution for Battery Operation16
Chapter 13	Control Panel and Key Instruction17
Chapter 14	Troubleshooting
Chapter 15	Maintenance and Preservation

Due to constant upgradation design, price and features are subject to change without prior notice.



Chapter 1 Main Technical Specification

1.1 Normal work environment

Operation

a) Environment temperature: +5°C~+35°C

b) Relative humidity: ≤80%

c) Power supply: AC:220V, 50Hz (110V,60 Hz)

DC: 7.4V, 3700 mAh rechargeable lithium battery

d) Atmospheric pressure: 86kPa~106kPa

Store and Transportation

a) Environment temperature: -10°C~55°C

b) Relative humidity: ≤95%

c) Atmospheric pressure: 50kPa~106kPa

1.2 Input way: Floating and defibrillation protection

1.3 Lead: Standard 12 leads

1.4 Patient leak current: <10µA

Input impedance: ≥50MΩ

1.6 Frequency response: 0.05Hz~150Hz (-3dB)

1.7 Time constant: Time constant>3.2s

1.8 CMRR: >60dB, >100dB(Add filter)

1.9 EMG interference filter: 35Hz(-3dB)

1.10 Recording way: Thermal printing system

1.11 Specification of recording paper: 80mm (W)×20m(L) High-speed thermal paper

1.12 Paper speed:

Auto-record:25mm/s, 50mm/s, error:±5%

Rhythm record:25mm/s、50mm/s, error:±5%

Manual-record:5mm/s、6.25mm/s、10mm/s、12.5mm/s、25mm/s、50mm/s, error:±5%

1.13 Sensitivity choice: 5, 10, 20, 40mm/mV, error:±5%. Standard sensitivity is 10mm/mV±0.2mm/mV

1.14 Auto-record: record following the record format and auto-mode, auto leads-changing, auto measurement and analyse.

1.15 Rhythm record: record following the rhythm format and rhythm mode, auto measurement and analyse.

1.16 Manual record: record following the record format, manual leads-changing.

1.17 Measurement parameters: HR, P-R interval, P Duration, QRS Duration, T Duration, Q-T interval, Q-Te, P Axis, QRS Axis, T Axis, R(V5), S(V1), R(V5)+S(V1)

1.18 Product safety type: Class I, Type CF, there is defibrillation and pacing protection circuit.

1.19 Enduring polarization voltage: ±300mV

1.20 Noise level: ≤15µVp-p

1.21 Fuse Specification: 2 pcs | \$\$\$ 20mm AC time lag; T250mA/250V(Power Supply:220V)

1.22 Size: 315mm(L)×215mm(W)×77mm(H)

1.23 Net Weight: 2.25Kg

Due to constant upgradation design, price and features are subject to change without prior notice.



Chapter 2 Security Notice

2.1 The power supply should be grounded properly before operation.

2.2 If the ground cable is not integrated, the device must be run with built-in power supply.

2.3 Please pull out power supply plug before changing the fuse.

2.4 This device must be operated and preserved by professional personnel.

2.5 The operator must read this user manual carefully before operation, and operate the device according to operation regulation strictly.

2.6 The design of this device has mature consideration of security, but operator should never neglect attention to device state and patient's situation.

2.7 Please turn off the instrument and pull out power supply plug before clean and disinfection .

2.8 Please don't operate this device in environment which contains flammable anaesthesia gas.

2.9 If this device is used with cardiac defibrillator or other electric stimulate devices at the same time,

please choose Ag/AgCl chloride chest electrode and ECG lead with prevent-fibrillation function. To

prevent the metal electrode burn patients' skin, the disposable chest electrode should be used if the

defibrillation time is over 55 seconds. It is better that do not use this device with other electric

stimulate devices at the same time. If it must be used at the same time, there must be professional technician guide on the scene.

2.10 When other devices are connected with this ECG instrument, they must be Type I devices which accord with IEC60601-1. Because the total amount of leakage current may hurt patients, the monitoring of leakage current is carried out and taken charge by connect devices.

2.11 Following descriptions concern special attentions in ECG measurement and interpretation.

- P wave and Q wave are not always reliable in the archive of intensive muscle artifact or AC interference. So are the ST segment and T wave.
- (2) Winding and unclear ends of S wave and T wave may lead to tolerance in measurement.
- (3) In archive R wave is left out due to the low voltage of QRS wave or any leads falling off, the measured heart rate may deviate greatly from the correct one.
- (4) Axis calculation and identify the QRS borderline are not always reliable in the archive of the low voltage of QRS wave.
- (5) Occasionally, frequent ventricular premature complexes may be identified as dominant beat.
- (6) Merging of versatile arrhythmia may result in untrustworthy measurement because of the difficulty in distinguishing P wave in such situation.
- (7) ECG300G is designed to carry on ECG trace interpretation immediately after the measurement. It is this interpretation that does not give report on all possible heart problems and may sometimes not comply with the doctor's diagnosis. Therefore, the final conclusion concerning each patient is up to the doctor basing on patient symptom, the unit ECG300G 's interpretation and other examination.

Due to constant upgradation design, price and features are subject to change without prior notice.



Www.westernsurgical.in *Western Surgical* Email : westernsurgical@gmail.com Ph. : +91-281-2232871 / 2243159

Chapter 3 Maintenance Regulation

3.1 Under the condition of normal use according to the user manual and operation notice, if this instrument has any problem, please contact with our customer service department. Our company has the sales record and customer archives for each instrument. The customer has one year's warranty service from the beginning of shipping date according to the below time and condition. To supply all-around and fast maintenance service to our customers, please mail the maintenance card to us in time.

3.2 Our company may adopt the ways of instruction, mailing to company by courier, visiting customers' company, etc to carry out the maintenance promise.

3.3 Even in the period of free maintenance, we charge for reparation in the following archives:

3.3.1 Faults or damnification caused by misuse because not operate according to user manual and operation notice.

3.3.2 Faults or damnification caused by dropping accidently when users move after purchasing.

3.3.3 Faults or damnification caused by preparation, reconstruction, decomposition, etc outside of our company.

3.3.4 Faults or damnification caused by natural disasters such as fire, flood, earthquake, etc.

3.3.5 Faults or damnification caused by unapt thermal recording paper.

3.4 The free maintenance period for spare parts and fray parts is half a year. Power cable, recording paper, operation manual and packing material are excluded.

3.5 Our company is not responsible for the faults of other connecting instruments cause by the faults of this device directly or indirectly.

3.6 The maintenance service is only efficient in Chinese Mainland.

3.7 The free maintenance service will be canceled if we find the protection label has been destroyed.

3.8 For charge maintenance beyond the warranty period, our company advise to continue to use

"Maintenance contract regulation". Please consult our customer service department for specific situation.



Chapter 4 Instrument Characteristics

4.1 Recording system: Thermal-array (8 dots/mm), you should not adjust anything Frequency Response is up to 150Hz.

4.2 The device can record real time clear and exact three channel ECG waveform and remark continually. The remark includes: lead sign, sensitivity, paper speed, filter state, etc.

4.3 Under automatic mode, just press the button once, it starts record procedure, which can enhance your work efficiency.

4.4 Soft keyboard control, more convenient for operation. TFT screen shows the working status, more clear for observation.

4.5 Safety Class: Class I, Type CF.

4.6 The power supply includes both AC/DC. This device includes built-in lithium rechargeable battery,

4.7 This instrument can record 150 pieces of ECG waveform and print 90 minutes continually under the best DC state.

4.8 This instrument can store more than 1000 pieces patient's data, more convenient for data review and statistic.

4.9 The figure of whole device is elegant and gliding.

4.10 According to defense degree of deleterious fluid, this device belongs to common device.

4.11 According to the safe degree used under the condition with flammable anaesthesia gas mixed with air (or oxygen, nitrous oxide), this device belongs to the device which can't be used under the condition with flammable anaesthesia gas mixed with air (or oxygen, nitrous oxide).

4.12 Digital signal processor for effective inhibition of baseline drift, interference, and the like.


4.13 The instrument has function with regular auto-measurement of ECG waveform parameter, auto-analyze and auto-diagnostic, it will help to reduce doctor's burden and improve working efficiency.
4.14 According to the working mode class, this device belongs to non-continuous working device.


4.15 Explanation of some symbols in this device:

~AC	AC work mode
OFF	Power supply is disconnected
ON	Power supply is connected
4	Equipotential point
Δ	Places need to be noticed, please refer to user manual
-	Device type is CF, which has defibrillation protection function
÷	RS232 connector
÷ >•	USB connector
	ENT Lead connector

Due to constant upgradation design, price and features are subject to change without prior notice.



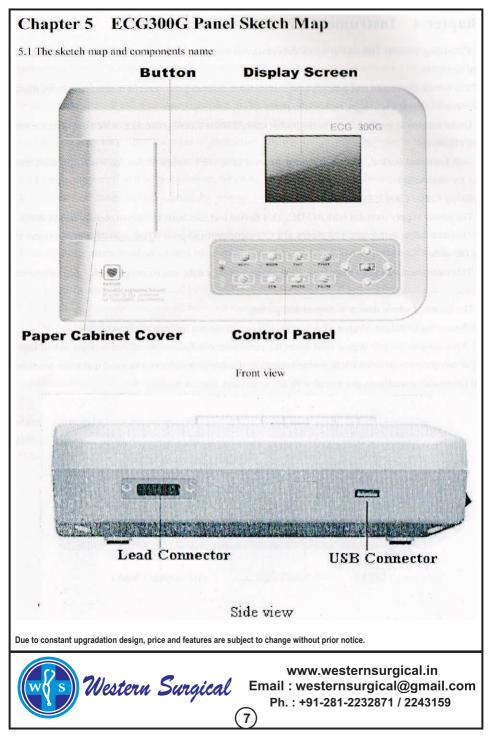

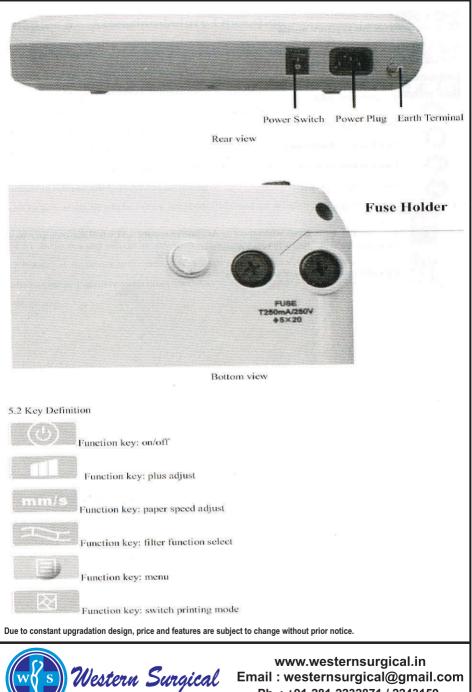

8

Email : westernsurgical@gmail.com Ph.: +91-281-2232871 / 2243159



Function key:1mV marker



Function key: print



Function key: enter



Function key: upwards



Function key: downwards



Function key: leftwards



Function key: rightwards



Indicator Definition



The indicator turns green when there is AC power supply, and when the indicator turns green and red same time it is being recharged.



Indicator for instrument when power on.

Due to constant upgradation design, price and features are subject to change without prior notice.

9



Chapter 6 Attention before Operating

6.1 You are required to read this operation manual carefully before operating so as to ensure taking safe and effective operation of the instrument.

6.2 Installation and maintenance of the instrument should be carried out as the following

6.2.1 There should be no high voltage cable, X radial instrument, ultrasound instrument and electrotherapeutics instrument, etc around the ECG instrument.

6.2.2 Do not use or reserve the instrument in the place where the air pressure is too high, temperature and humidity are over the common standard, the ventilation is not good, dust is too much, there is gas containing salt and alkali and chemical medicine.

6.3 The instrument should be put on flat place. Take and put it lightly when move it. Avoid too strong vibration and shoek.

6.4 AC frequency and voltage value should accord with requirement and has enough current capacity.6.5 Please put the device at the place where is easy to be grounded. Do not connect the patients and the patients connecting cables with other conductors including ground or beds which can be conducted well with ground.

Chapter 7 Preparation Work before Instrumentation

7.1 Check that the instrument properly grounded and that eable connections safe or not.

7.2 Make sure all electrodes directly connected with patient are properly and firm.

7.3 Check the output voltage when choose the DC UPS.

7.4 Smear the gel separately, avoiding the short circuit caused by the chest electrode touch one another.

7.5 AC power cable can not be enlaced with ECG cable.



Chapter 8 Precaution during Operation

8.1 Pay attention to the patient and instrument condition constantly.

8.2 Patient and instrument can only be connected ECG cables.


8.3 Keep close observation of the patient and instrument, to make sure they are not moved during operation.

8.4 Turn off the instrument after using.

8.5 Turn off the power, and remove the ECG cables slightly without force.

8.6 Properly keep the instrument and spare parts for operation next time.

8.7 Paper Loading

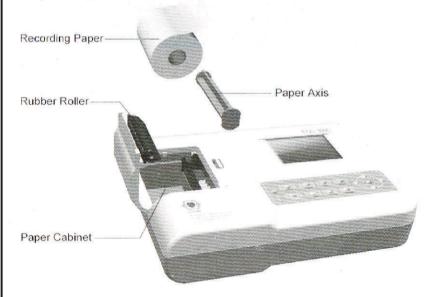

8.7.1 Dimension of the high-speed thermal Recording paper used in this instrument is: 80mm (W) \times

20m(L)

8.7.2 Open the cover of paper cabinet, take out the paper axis and install recording paper according to


the figure into the proper position inside.

8.7.3 Close the cover of paper cabinet. It's recommended to leave 2 cm of recording paper outside.



Chapter 9 Instruction of Recording Paper

9.1 Message "No Paper." will be displayed on the LCD whenever recording paper is run out.

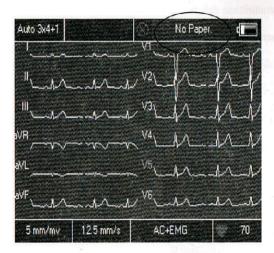

9.2 Specified paper of high sensitivity is recommended for high-quality prints. Other kind of paper may not render a clear permanent trace and may damage the printing mechanism. Please consult distributor or manufacture for detail of how to purchase the paper.

9.3 Failure of the recording paper might be affected by high temperature, bad humidity or direct sunlight.

For long storage, the recording paper should be placed in dry, dark and cool area.

9.4 Substance may caused stain of the recording paper:

Gel, glue, and wet diazo compound paper including their organic solvent.

9.5 Substance may caused the waves fade away:

File folders made of soft PVC material, plastic etc; eraser and magnetic tape contains plasticizer;

fluorescence, and stamp-pad ink.


Due to constant upgradation design, price and features are subject to change without prior notice.



Chapter 10 Electrode Placement

Advice: Set the chest electrode first, then the limb electrode.

10.1 Chest Electrode



Attach the chest electrodes to the locations as following:

V1: Fourth inter-costal space at right border of sternum.

V2: Fourth inter-costal space at left border of sternum.

V3: Midway between V2 and V4.

V4: Fifth inter-costal space at left mid-clavicular line.

V5: Left anterior axillary line at the horizontal lever of V4.

V6: Left mid-axillary line at the horizontal lever of V4.

Clean the skin where chest electrodes are to be attached with alcohol, then apply ECG cream to here


around 25mm in diameter and to the edge of chest electrodes, and press and attach the electrodes to the

positions from VI-V6.

Note:Keep in mind that the electrodes' coming into contact with each other or cream's overlap from one position to another is not allowed.

10.2 Limb Electrode

Electrodes should be placed on the soft skin of hands and feet. Clean all the limb electrodes and the positions around to which limb electrodes are to be attached with alcohol before applying ECG cream to them, then firmly attach the electrodes to the positions



Caution: Screw tightly the knob of ECG cable's plug after it inserted to the instrument.



Electrode Location	Electrode Code	Socket Number
Right Alarm	RA/R	9
Left Alarm	LA/L	10
Left Leg	LL/F	11
Right Leg	RL/N	14
Chest 1	¥1/C1	12
Chest 2	V2/C2	1
Chest 3	V3/C3	2
Chest 4	V4/C4	3
Chest 5	V5/C5	4
Chest 6	V6/C6	5

10.3 Check-List for Electrode connection and ECG cable

Note:

- 1. Please apply leads in the close state.
- 2. Please check the electrode contact the skin well or not ,if the ECG didn't appeare for a long time, then press the start key which will close in several milliseconds several times.
- 3. please apply conductive jelly when place electrode .

Chapter 11 Grounding and Power Connection of Instrument

Make sure the status of the instrument is power off, and then make the instrument be properly grounded through a 3-prong outlet. When the outlet, a grounding cable may be utilized to connect the grounding terminal of the instrument. Do not use other pipeline. Properly grounding could guarantee the safety and prevent from the interference of AC power and electromagnetic wave.



Chapter 12 Precaution for Battery Operation

12.1 This instrument is designed with the built-in sealed maintenance-free rechargeable lithium battery, and has automatic charge and discharge monitoring system. The instrument recharges the battery automatically when connect to AC power supply. The LCD screen will show the current power state at the top right corner when the instrument turns on(see 12.4). It needs about 4 hours for battery charge after discharge absolutely.

12.2 The device can continuously print 90 minutes and work 4 hours without printing after the battery fully charged. When it working, the LCD screen displays the signal of the battery status in 5 degree. When the power of battery is too low to operate, the instrument will turn off automatically to avoid damage to the battery.

12.3 The battery should be recharged in time after exhausted using. For long storage, the battery is to be recharged every 3 months. The battery life can be extended by doing so.

12.4 Seven status of the battery power displayed on LCD as following:

No.	mark	description
a	•••	Unknown status, normally displayed while the instrument being turned on within 1 minute
b	=>~	Using AC power
c		Using battery, and full power
d		Using battery, volume : 3/4
e	•	Using battery, volume: 1/2
f	•	Using battery, volume : 1/4
g	•	Using battery, but lower power, suggest to recharge the battery or use AC power supply

Note: When charging, the battery icon shift from f to c.

12.5 When the battery can not be recharged or works no more than 10 minutes after fully charged, please change the battery.

Attention !!!

• Do not directly connect both "+" and "-" polars of battery with wire, otherwise it might cause fire hazard.


- Possible explosion hazard if it kept nearby the ablaze area.
- You should not open or disassemble the battery.



Chapter 13 Control Panel and Key Instruction

13.1 Main Interface

Show as following:

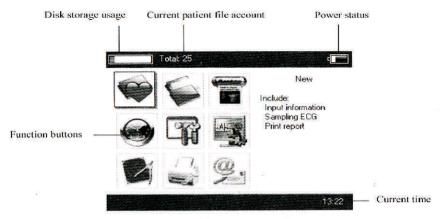

Power status: Please refer to 12.4

Keypad:



Enter sampling interface, when the instrument is powered on, it will automatically start this

operation.



Enter Archive management interface, query, modify or delete archive information



See sketch map for electrodes placement



Date and time settings



System settings






Sampling settings

Analysis parameters settings, settings for each parameter using for automatic analysis



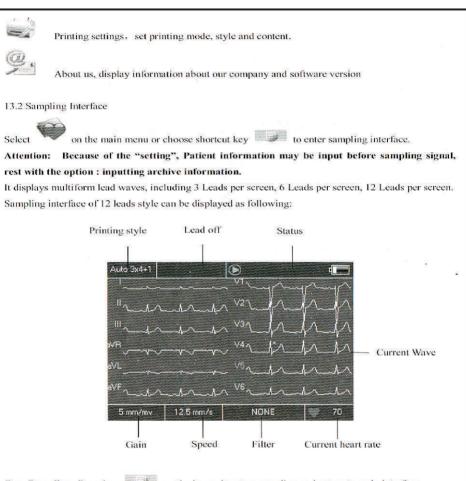

Stop Sampling: Press key on the keypad to stop sampling and return to main interface.

Lead Change: You can press key 🔘 / 🔍 to show the other leads. The leads use by manual print.

Switch Lead Style: Press key \bigcirc / \bigcirc to switch the lead style among 3 leads per screen, 6 leads per screen and 12 leads per screen. Lead Off: Under Demo mode, it displays "DEMO ECG". Under sampling mode, it displays information of lead off.

Change Recording Style: Press this key is to change recording mode among auto $3 \times 4 + 1$, auto 3×4 , auto $2 \times 6 + 1$, auto 2×6 , auto 4×3 , rhythm 4, rhythm 3, rhythm 2 and manual mode.

Adjust Gain (Sensitivity Selection): Sensitivity is to be selected by pressing key . User can choose 5mm/mV, 10mm/mV, 20mm/mV or 40mm/mV.



Adjust the speed:Use the key of speed adjusting to change the speed :5mm/s, 6.25mm/s, 10mm/s, 12.5mm/s, 25mm/s, 50mm/s, Auto-record and Rhythm record can not support 5mm/s, 6.25mm/s, 10mm/s, 12.5mm/s when printing.

Shift the filter: Use the key of filter selection to shift between non-filter, AC, EMG, DFT, AC+EMG, AC+DFT, EMG+DFT, AC+EMG+DFT.

Display the calibration: Use the key of "1 mV" to display the marker of 1 mV on the screen.

Print/ finish the print: Use the key of "print" on the keyboard, then can start or stop a printing operation.

Automatic mode: After starting printing, the system will print and store synchronic twelve leads waveform automatically. The length decided by the setting item in the printing option. And also according to the setting item, print out the data and result which analysed automatically and the system can finish the printing automatically.


Manual mode: After starting printing, the user should print out the real waveform by shifting the group of leads. That means the ECG waveform printing under the manual mode is non-synchronic, and can not be saved. And the user should end the printing by press the key again.

Display content	Remark			
Process in the process of printing				
Waiting	in the process of ending printing			
No Paper. Lack of paper, the user should restart the oper papers.				
Print Timeout.	The connection between system and printing sub-system brok			
ECG Timeout	The connection between system and sampling sub-system br			
Low Power	Low power, the system can not start the print work.			

During printing, the printing state includes:

Note: Please print after the ECG was diaplayed in the screen .

On this interface, press the button interface;



19




Select OK Ibutton, the system will apply new settings and return to sampling interface. Select Cancel I, the system will return to sampling interface without apply the new settings. The each function of option is shown in the following table.

item	Optional content	remark		
AC Filter	[ON]/[OFF]	Setting of using AC Filter or not		
EMG Filter	[ON]/[OFF]	Setting of using EMG Filter or not		
DFT Filter	[ON]/[OFF]	Setting of using DFT Filter or not		
Rhythm Lead	Setting the rhythm lead to print ECG in rhythm print mode.			
Show Style	[3 Leads]/[6Leads]/[12Leads]	Setting of wave show style.		
Show Gain	[5mm/mV]/[10mm/mV]/[20mm/mV]/ [40mm/mV]	Setting of wave show gain.		
Show Speed	[5mm/s]/[6.25mm/s]/[10mm/s]/[12.5m m/s]/[25mm/s]/[50mm/s]	Setting of wave show speed.Auto-record and Rhythm record can not support 5mm/s, 6.25mm/s/10mm/s 12.5mm/s when printing.		

13.3 Inputing Archive Information

According to the different setting items(refer to 13.8),user can input the patient archive before or after sampling, and also can input blank archive. The input box as following:

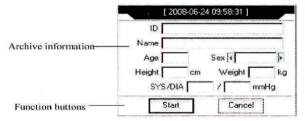

Choose any input-box, as pressing key, the "soft keyboard" will pop out as following. The function of [Caps] button on "soft keyboard" is to change the number key and lower archive to punctuation and upperarchive. Press [OK] will confirm input and exit this interface.

0 1	2	3	4	5	6	7	8	9	Ca	ps
a b	С	d	е	f	g	h	[i	j	K	1
mn	0	q	q	r	s	t	u	V	ω	X
y z	s	pac	e	Bk	spa	се]	-	OK	Guiler


20



There maybe a limit of character according to the content input. And then the limited character will be gray and unavailable, as following: Available n 8 Caps Unavailable 5 Space Bkspace **DK** 13.4 History Archive Management In the main interface, select the button of then you can enter the archive management interface, as following. Current archive sum / Total archive Total: 22 Current: 6 / 22 Date and time ID. Sex Name 2008-06-11 08:30:53 0001 GaoXiaohua F 0002 SonoGuano 2008-06-10 15:31:15 M Archive list 0003 F 2008-06-10 15:12:39 LiCui 2008-06-10 14:51:26 0004 2008-06-10 14:27:21 0005 Current selected archive 2008-06-10 14:25:03 0006 ZhangXiaohua Ν 0007 2008-06-04 14:08:49 2008-06-04 11:57:12 0008 **OinXiaohua** F 2008-06-04 09:33:02 0009 2008-06-04 09:14:47 0010 CaiLinlin M Review >1 Delete Adv-opr K << >> Return Pages roll buttons Delete the selected archive Exit this menu Display advanced menu Display review dialogue box This interface shows all the storage archive. The users can use the searching function (refer to 13.5 archive querying) to select the required archive; and edit any archive by modifying or deleting operation; besides the user can review the saved archive information. (refer to 13.6 archive review). : Go to the first page of archive list. : Go to the last page of archive list. : Go to the previous page of archive list.


 \geq : Go to the next page of archive list.



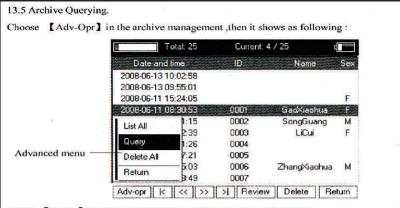

Select 【Query】 can start a archive Query dialogue box as following.

Input searching condition, and select [Select] button, and the user can get expected result. The function of [Clear] is to clear the query condition input.

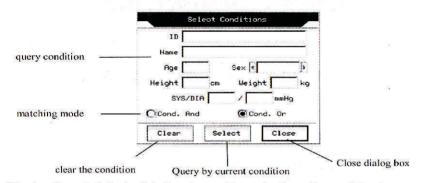


[Cond. and] and [Cond. or] indicate the matching mode of searching condition, the user can select either. If select [Cond.and], the searching result will fit all the conditions input simultaneity; if select [Cond.or], the searching result will display the ones which fit any of the conditions.

Suggestion: On the conditions of large number of patients archive, should input the confirmed searching conditions, select 【Cond. and】, can find out the certain patient archive immediately.

13.6 Archive Review

On Archive management interface, after moving focus on the right patient archive being reviewed, select [Review] can start the following dialogue box which shows the patients archive information, users can modify here, select [Save], the change, which is not reversible .will be saved.



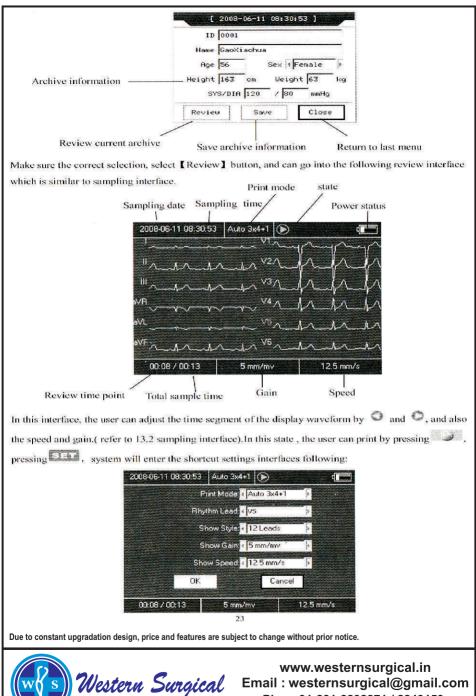

Ph.: +91-281-2232871 / 2243159

Select **(**OK**)** button, the system will apply the new settings and return to review interface.Select **(**Cancel**)** button, the system will return to review interface without applying the new settings. Each function of the option is as following:

item	Optional content	remark		
Print Mode	[Auto 3×4]/[Auto 2×6]/[Auto 4×3] and any mode suit current archive	Setting of printing mode.		
Rhythm Lead	Anyone of 12 leads	Setting the rhythm lead to print ECG in rhythm print mode.		
Show Style	[3 Leads]/[6 Leads]/[12 Leads]	Setting of wave show style.		
Show Gain	[5mm/mV]/[10mm/mV]/[20mm/mV]/[40mm/mV]	Setting of wave show gain.		
Show Speed	[5mm/s]/[6.25mm/s]/[10mm/s]/[12.5m m/s]/[25mm/s]/[50mm/s]	Setting of wave show speed. Auto-record and Rhythm record can not support 5mm/s, 6.25mm/s, 10mm/s, 12.5mm/s When printing.		

13.7 Date and time Settings

In the main interface, select Solution, can start the following dialogue box showing the date and time settings.

De	cembe	Br		•	2008			
	Mon	Tue	Wed	Thu	Fil			
	1	2	3	4	5	6	11	12 1 3
7	8	9	10	11	12	13	10	12
14	15	16	17	18	19	20	-9	
21	22	23	24	25	26	27	1.8	4.
28	29	30	31				1.7	. 5.
09	нн		08 MM	-	15 59	5 1.	пк	Cance

In this interface, the users can select \bigcirc and \bigcirc key to shift all the items, using \bigcirc and \bigcirc to adjust the options content.

13.8 System Settings

In the main interface, select

button, can start the following system settings dialogue box.



ScreenSaver:	None	•
Back-light	Always On	•
Auto Off:	None	4
Low Power:	Always	
Info Input:	None	
Filter Freq:	50Hz / 35Hz	
Language [< English	•
🔳 K-B Sound	🗌 Demo Mo	de
Default	OK	Cancel

In this, select the button [Default], the system settings will back to the default.

The each function of option is as following:

item	Optional content	remark			
Screen saver	None/30Seconds/1Min ute/2Minutes/5Minutes/ 10Minutes	The screen saver will be active after the selected time without any operation. "None" means that this function will not be used.			
Back-Light	30Seconds/1Minute/2M inutes/5Minutes/10Minu tes/Always On	The back-light will be turned off after the selected time."Always On" means that the back-light will be turned off never.			
Auto off 1Minute/3Minutes/5Min utes/10Minutes/ 15Minutes/30Minutes /60Minutes/None		The system will be shut down if no operation after the selected time. None means the fuction is not effective.			
Low Power None/Only Once /Always		The system will take which alarm scheme when the power of battery is going to be used up.			
Info Input Before/After/None		Set up the time when inputting archive information.			
[50Hz/35Hz]/[50Hz/25H Filter Freq z]/[60Hz/25Hz]/[60Hz/3 5Hz]		Set up the parameter of AC Filter and EMG Filter.			
Language	[English]/[Chinese], etc.	Set up the default system language.			
K-B Sound On/Off		When pressing the key on keyboard, the instrument will make a sound if "On" is selected.otherwise it will no sound.			
Demo Mode	On/Off	The system will run under demo version, if "On" is selected. otherwise it will run under normal version.			

13.9 Sampling Settings

Select

in the main interface, can start the following sampling setting dialogue box.



	AC Filter:	F
	EMG Filter:	(F
and the second second	DFT Filter: OFF]
A	Show Style: 12 Leads	F
	Show Gain: 10 mm/mv	A
Ser.	Show Speed: 45 mm/s	
Default		K Cancel

Select the button [Default], the sampling settings will back to the default.

The each function of option is as following:

item	Optional content	remark
AC Filter	[ON]/[OFF]	Setting of default using AC Filter or not.
EMG Filter	[ON]/[OFF]	Setting of default using EMG Filter or not.
DFT Filter	[ON]/[OFF]	Setting of default using DFT Filter or not.
Show Style	[3 Leads]/[6 Leads]/[12 Leads]	Setting of default show style.
Show Gain	[5mm/mV]/[10mm/mV]/[20mm/mV]/[40mm/mV]	Setting of default show gain.
Show Speed	[5mm/s]/[6.25mm/s]/[10mm/s]/[12.5m m/s]/[25mm/s]/[50mm/s]	Setting of default show speed.Auto-record and Rhythm record can not support 5mm/s, 10mm/s, 12.5mm/s when printing;

13.10 Analysing Parameter Settings.

Select the

button in the main interface can start the following analysing parameter setting dialogue box:

The settings here will affect the diagnose hint of the real-time analysis, archive review and print report during sampling.

	Rhythm Lead:	< V5		
	Premature(%):	78		
- All States	Pause Time(ms):	2000		
т	achgcardia(bpm):	100		
B	radycardia(bpm):	60		
Default		1	OK	Cance

Select the button [Default], the system settings will back to the default.

Refer to follow:




item	remark
Rhythm Lead	Setting the rhythm lead to analyze heart rate and print ECG in rhythm print mode.
Premature	The system will use the inputted value as a standard of judging premature beat .
Pause Time	The system will use the inputted value as a standard of judging pause beat.
Tachycardia	The system will use the inputted value as a standard of judging tachycardia.
Bradycardia	The system will use the inputted value as a standard of judging bradycardia.

13.11 Print Settings

7

Select the

button in the main interface, can start the print setting dialogue box like illustration:



Select the button [Default], the print settings will back to the default.

In this interface, the automatic mode option can only be effective when select "auto" in [Print Mode].

item	Optional content	remark
Print Mode	[Auto 3×4+1] /[Auto3×4] /[Auto2× 6]/[[Auto 4×3] /[Rhythm2]/[Rhyth m 3]/[Rhythm 4]/[Manual]	The selection will be used as the default print mode.
Lead Gain	Smart/Current	The selection will be used as the default Lead Gain. "Smart" means that the system will adjust the lead gain automatic to fit, the height of paper while printing. "Current" means that the system will use the screen lead gain while printing.
Auto strip	3Sec/4Sec/5Sec /6Sec/8Sec/10Sec/ 15Sec/20Sec/25Sec	The selection will be used as the default print time length of step.
Rhythm strip	10Sec/15Sec/20Sec /25Sec/30Sec	Under the print mode is "Rhythm 2", "Rhythm 3" Or "Rhythm 4", the system will use the select option as the print time length of rhythm strip.
Average QRS	[2×6]/[2×6+Mark]/[3×4]/[3×4+Mark]/[4 ×3]/[4×3+Mark]/[N one]	Under the print mode is "Rhythm" Or "Auto", the system will use the select option as the default print style of average QRS.

Due to constant upgradation design, price and features are subject to change without prior notice.



Auto-Diag	All/Data /Conclusion/None	The auto-diagnose contains 2 parts of data and conclusion, user can print one of them only as his wish.
Periodic	[per1Min]/[per 2 Min]/[per3Min]/[per 5Min]/[per10Min]/[per20Min]/[per30Mi n]/[per 60 Min]/[off]	The system will print ECG periodically in the select time interval, If the option of print mode is selected as "Manual", the system will print in "Auto3 \times 4 + 1". Otherwise, the system will print in selected mode.


Note: Auto strip, Rhythm strip, Average QRS, Auto-Diag, Periodic are available when "Auto" Or "Rhythm " print mode is selected.

13.12 Checking Electrodes Placement



Select

button on the main interface can start the following lead emplace illustration interface:

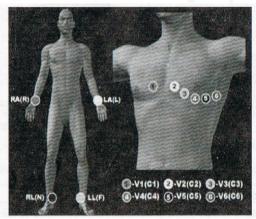

Select any key can exit this interface.

13.13 About Us

Select Select Select subtraining the main interface can start the information interface related to this instrument. This interface shows the instrument name, version, company name, copyright and company contact detail.




Chapter 14 Troubleshooting

14.1 Turn off automatically

- Please check whether the power of battery is used up. Over discharge control circuit of the battery acts.
- (2) Please check whether the alternating current voltage is too high.Overvoltage control circuit acts.
- ③ Please check whether the alternating current disturb is too high, whether the fix knob of lead plug

is too tight. Shut automatically is for protecting circuit when overload.

14.2 AC interference

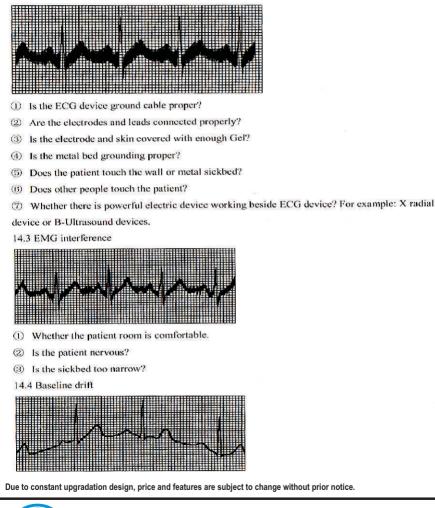

Western Surgical

28

- ① Verify the electrode attachment and lead wire performance.
- ② Check the connection between patient cable and electrodes.
- ③ Check the cleaning of electrode and patient skin. Is the electrode and skin covered with enough Gel?
- (d) Keep the patient from motion or hyperventilation.
- (5) Is the connection between lead and electrode proper?

Please use filter if still having above-mentioned interference.

14.5 Troubleshooting List

Phenomenon	Reason	Resolve method
	1.Whether the ground cable proper.	I Please check the lead, ground cable and power supply.
Disturbance too big, the waveform		2.Please dispose the patient in proper state.
	3-Whether there is disturbance from	
	alternating current.	
	4-Patient is nervous	
-	I Disturbance from alternating current is	l·Change a comfortable
	too fierce.	environment for patient
	2-Patient is nervous and the disturbance of	2-If the sickbed is metal, please change
Baseline is rough	EMG too strong	it.
		3. The power line and lead is not parallel
	~	or too close.
Hannet All Inc. 1. May Harves	1. The conductivity of electrode is not well.	1-Use alcohol of high quality.
Wave form is not	2.Power of battery is used up	2 Clean the electrode and patient's skin
regular, with too		where touch the electrode
great wave or	3.Contact between electrode and skin is not	3 Charge the battery
beeline	proper.	о а с 1 жин
	4. The plug between lead and main unit is	
	not tight.	
	5-The contact between lead and electrode is	
	not proper.	
Baseline drift	1.Power of battery is used up	1. Charge the battery
	2.Patient is moving	2.Keep patient hold still
	1. The printer head is dirty	I-Clean the printer head with alcoho
Waveform is not		when the power is off, use the printer
clear.		head after the alcohol is volatiled.
	2 ·The paper is not right	2. Use the appointed thermal print paper.

Due to constant upgradation design, price and features are subject to change without prior notice.



Chapter 15 Maintenance and Preservation

15.1 Customer is not permitted to open the instrument, in archive of any electronic shock. Any

maintenance or update should execute by the trained and authorised professionals from our

company. The maintenance should be done with the original accessories from our company .

15.2 Please pull out the power supply plug when power off. If the device is out of use for a long time, please put the device in a shady cool dry place, and the device should be charged once every three months.

Date of Installation	Installed By	
Model No.	Serial No.	
Warranty Period		
Name of Doctor & Address :		

Customer Sign. With Stamps

Marketed By: Western Surgical Sign. With Stamps

No Claim Warranty : 1) Any Defect Througut Power Supply 2) Any Physical Damage 3) Under Warranty Standby Unit Not Provide 4) Under Warranty When Company Send Parts or Machine we Imidiat send to Buyer.



OUR OTHER PRODUCTS RANGE



Due to constant upgradation design, price and features are subject to change without prior notice.

Western Surgical

"Happy Home", 2nd Floor, 23, Karanpara, B/h. S.T. Bus Stand, Kanak Road, Rajkot-360 001. Ph. : 0281-2232871/2243159 Mo. : 98250 69069 - 98250 45997 Email : westernsurgical@gmail.com Email : info@westernsurgical.in

* www.westernsurgical.in

